

# How To:


## Install Silicone Edge Graphics (SEG)

40 VISUALS




WATCH THE VIDEO


[40visuals.com/how-to-insert-a-silicone-edge-fabric-graphic](https://40visuals.com/how-to-insert-a-silicone-edge-fabric-graphic)

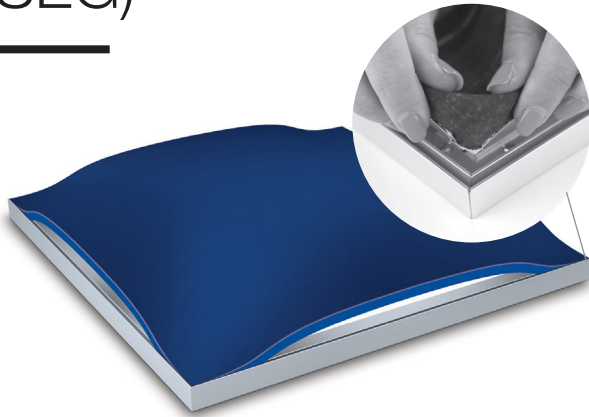


1 Start by folding one corner edge of the graphic so the silicone strip points down and the fabric wraps over it. See below.

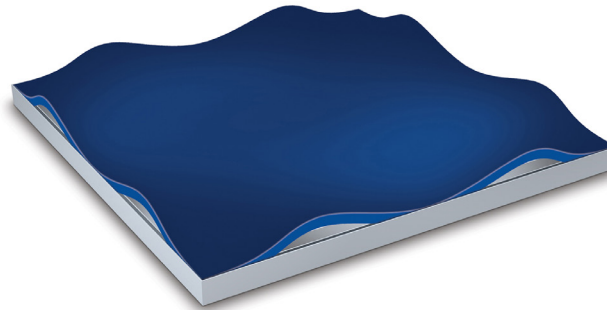

2 Insert one corner, the opposite diagonal corner, then the last two corners. Insert a small amount at the midpoint of each side.

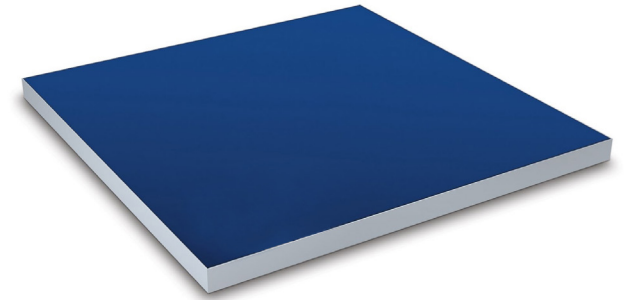

3 Work from the middle on each side out toward the corners. Continue until the graphic is evenly taugth in the frame.

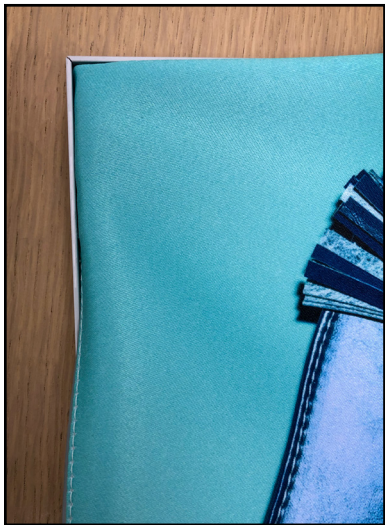

✓ Silicone Covered



✗ Silicone Visible

### Care Instructions



Do **NOT** wash or steam **UV SEG** fabrics. Store rolled to prevent wrinkles.



Dye Sub SEG Fabric graphics can be machine washed in cold water on a delicate cycle, or dry-cleaned if preferred.



Gentle detergent such as Woolite is recommended for washing fabric.



Tumble dry on delicate / low heat setting.



Any wrinkles should subside after a day once pulled taugth in the frame. A fabric steamer can also be used if needed.

**DO NOT IRON.**